

Accessory

Ideal for use in conjunction with HF Express Y-Fit range using the hook end fixing, or alternatively our UniGrip Y-Fit, offering quick and easy containment suspension.

FEATURES / BENEFITS

- Designed for suspending or wall and soffit mounting
- Storage height increased to 110 mm (G400 = 100 mm)
- Clearance increased to 130 mm to fit electrical cable easily
- Cables are loaded easier and faster
- Complete installation is well balanced
- Ability to stack back to back or one on top of each other
- Lightweight
- The G-Spacer allows the linking of two G-Brackets, with a distance of 300 mm to separate both electrical and data cables



INSTALLATION



Vertical stack



Back to back



With G-Spacers




With Hook Y-Fit Accessory



With UniGrip Y-Fit

SPECIFICATION

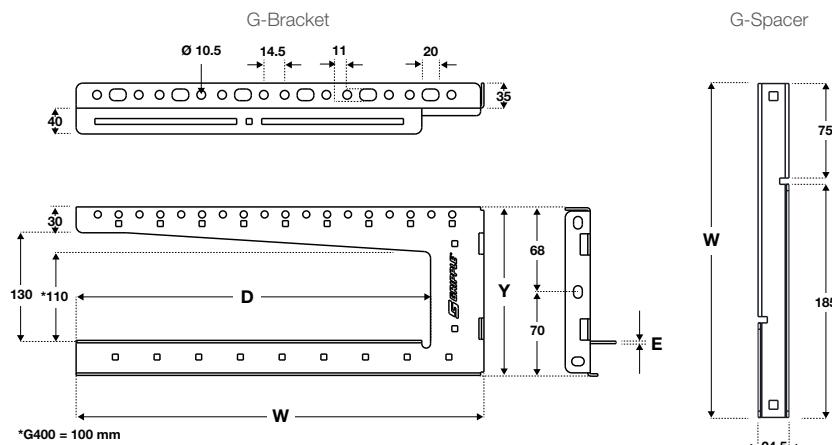

For illustration purposes only. Profile will differ for each variant.

Product Code	Maximum Working Load (kg)	D (mm)	W (mm)	E (mm)	Y (mm)
G100	30	125	188	2	200
G200	60	200	263	2	200
G300	60	325	389	3	202
G400	60	425	489	3	202
GSPACER	-	-	265	2	-

AVAILABLE HANGERS



For more options on available hangers please contact us or visit www.gripple.com

SUBMITTAL INFORMATION

Safe Working Load:

Load rating – 1.7:1 (see table)

Material:

(Mild Steel) BS EN 10346:2009 DX51D

Approvals:

Load tested by Element Materials Technology (ISO 17025) and witnessed by Lloyds Register QA.



Gripple Europe SARL | 1, rue du commerce | BP 37 | 67211 Obernai Cedex | France
Tel +33 (0)3 88 95 44 95 Fax +33 (0)3 88 95 08 78 Email info@gripple.com