


The next generation of wire rope suspension products designed for the fast suspension of ductwork, including multi-tier installations. Ideal for Phenolic & PIR fabricated ductwork.

FEATURES / BENEFITS

- **Quick** – up to 6 times faster than traditional suspension systems
- **Safe** – push-fit directly into the underside of the duct. Fast, tool free insertion with less time at height
- **Easy** – integral ergonomically designed release button allows for simple adjustment
- **Secure** – button acts as a locking screw and indicator clearly highlights the wire is locked in position for ultimate security
- **Strong** – 15 Kg per bracket with a 5:1 safety factor




INSTALLATION & ADJUSTMENT

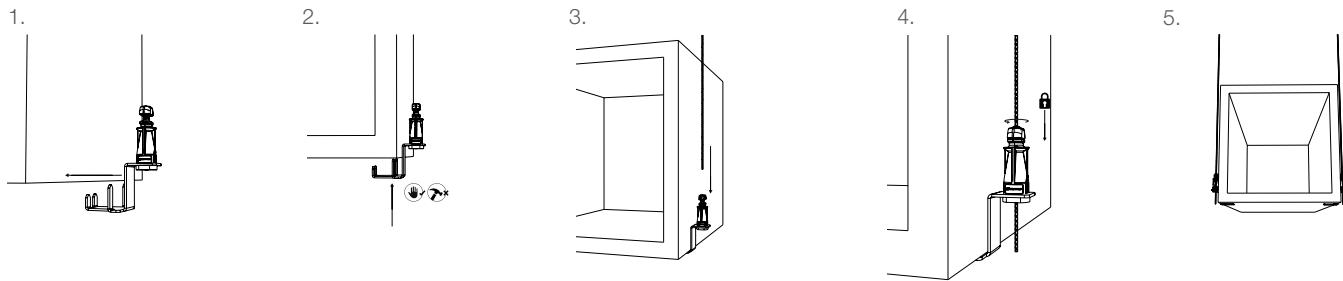

Maximum off axis suspension = 15° (unless otherwise specified by Gripple Technical Services)

SPECIFICATION

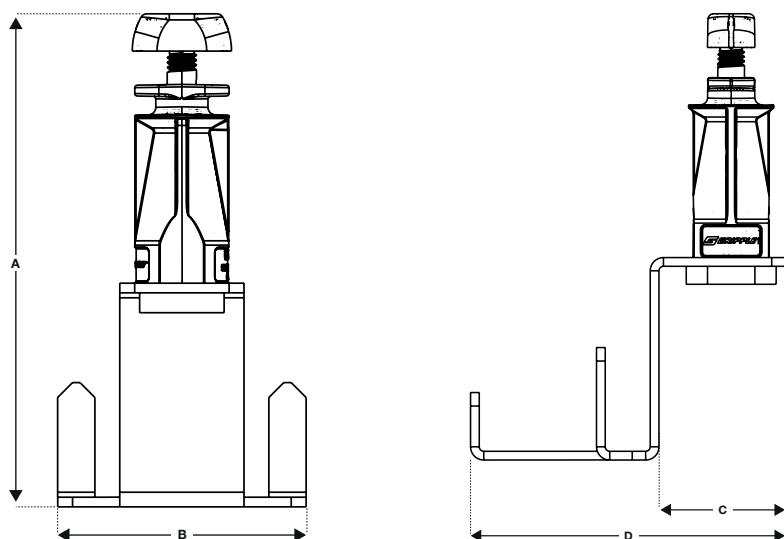

No. 2	Dimension	A	B	C	D
	mm	98	50	28	68

AVAILABLE END FIXINGS



For more options on available end fixings please contact us or visit www.gripple.com

SUBMITTAL INFORMATION

Load Rating:
No. 2 - 15 kg per bracket
5:1 safety factor

Material:

Housing - Type ZA2 Zinc
Carriage - Acetal Copolymer
Wedge - Sintered steel hardened to min. 56 Rockwell C
Button - Acetal Copolymer
Hex Nut Bolt - Mild Steel Bright Zinc Plated
Adaptor Bracket - 2 mm Galvanised Steel